

Gamme EVO insertion dans cloison de distribution 72

Descriptif:

Cloison à ossature aluminium alliage 6060T6.

Equerre de liaison en acier traité et maintien des vitrages par clips ressort.

Largeur cloison 80 mm, largeur habillage 40 mm.

Création de chassie vitrée ou de bloc porte aluminium dans cloison de distribution.

Finitions:

Laqué dans la gamme RAL ou Anodisé.

Remplissages:

Simple ou double vitrage 6 ou 8 mm.

Portes:


Porte bois épaisseur 40 mm

Porte à cadre aluminium épaisseur 40 mm


Porte Clarite

Siège social: 3 route de Bichailloux
19 ZA Croix Saint Mathieu
28320 Gallardon
France


Téléphone: +33 6 78 87 57 37
Mail: info@sact.fr
Site internet: www.sact.fr

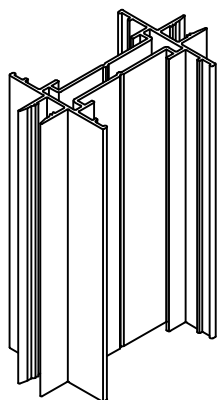


Poteau
ref: EVO150

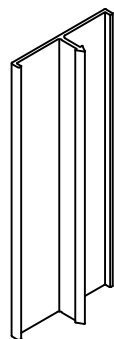


Habillage
ref: EVO155

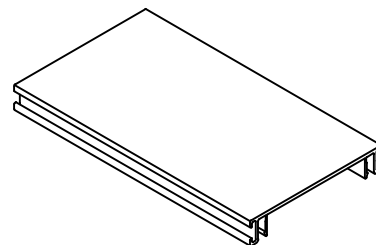


Carter double vitrage
ref: EVO219

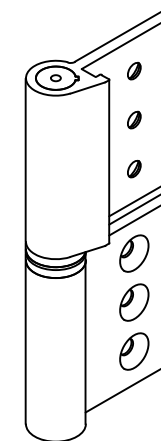


Paumelle
ref: AC10

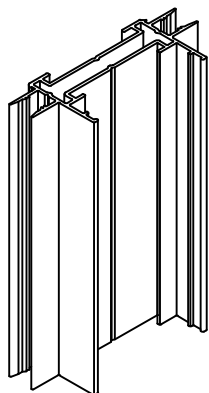

Demi poteau
ref: EVO151

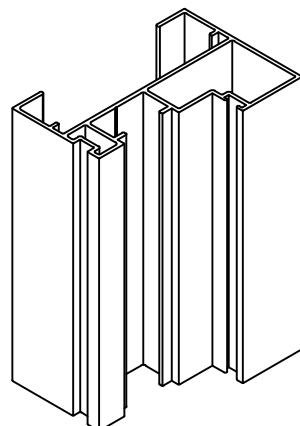


Huisserie
ref: EVO400

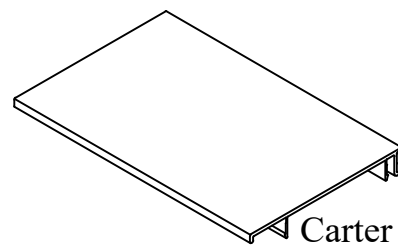


Carter simple vitrage
ref: EVO220




Clips
ref: AC01

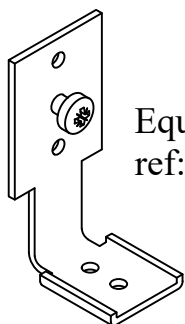


Equerre d'assemblage
ref: AC40

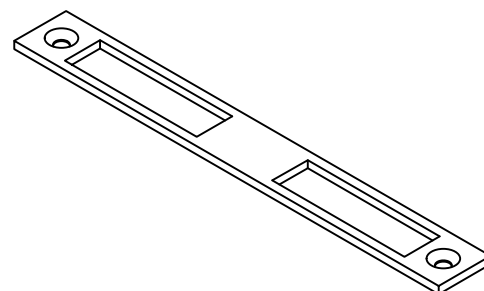




Gâche Inox
ref: AC15

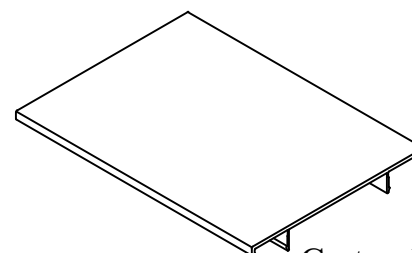


Carter de finition
ref: EVO221


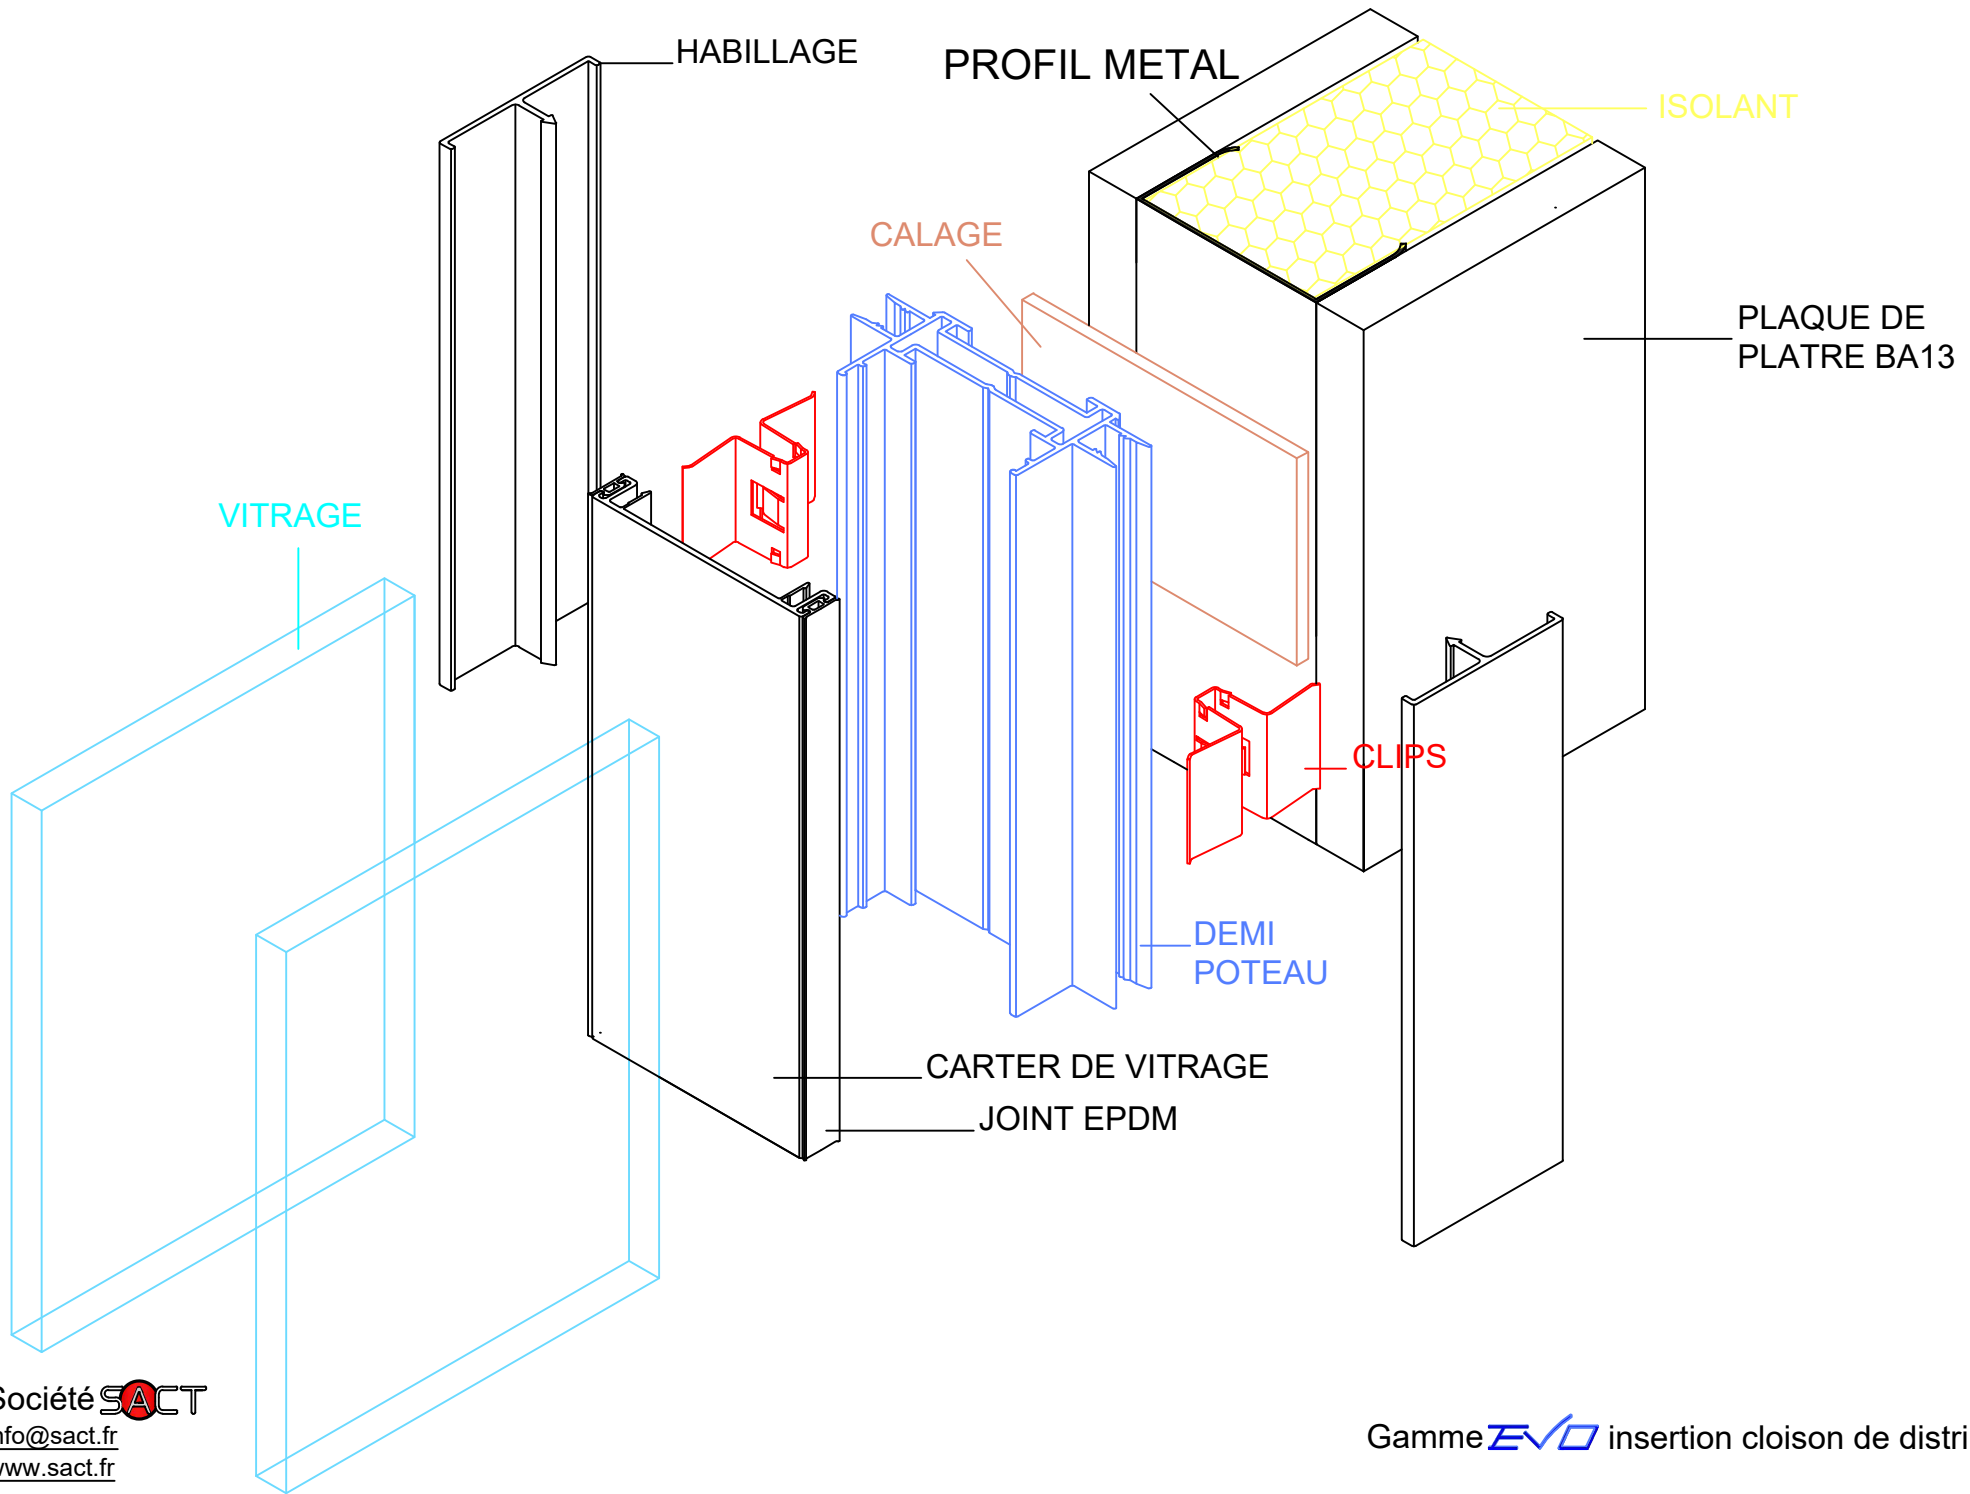


INSERTION DE MODULES VITRES DANS CLOISONS DE DISTRIBUTION 72/48 PAREMENTS SIMPLES BA13

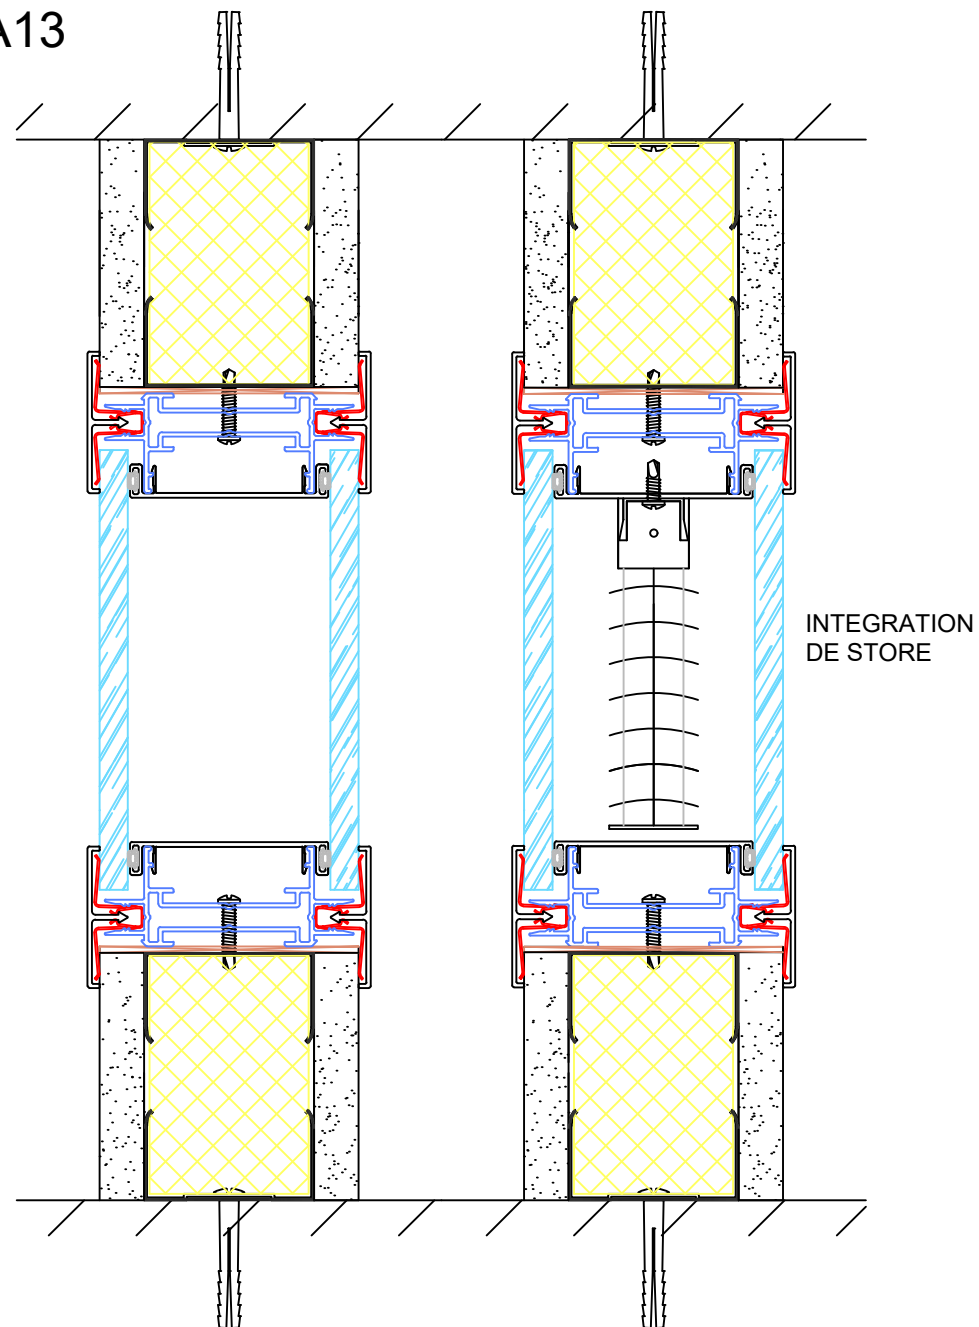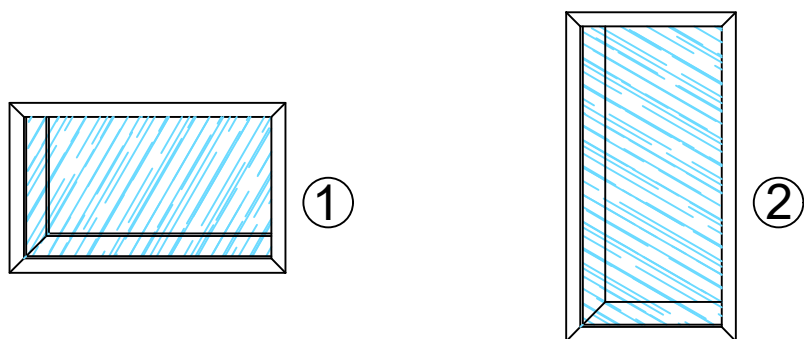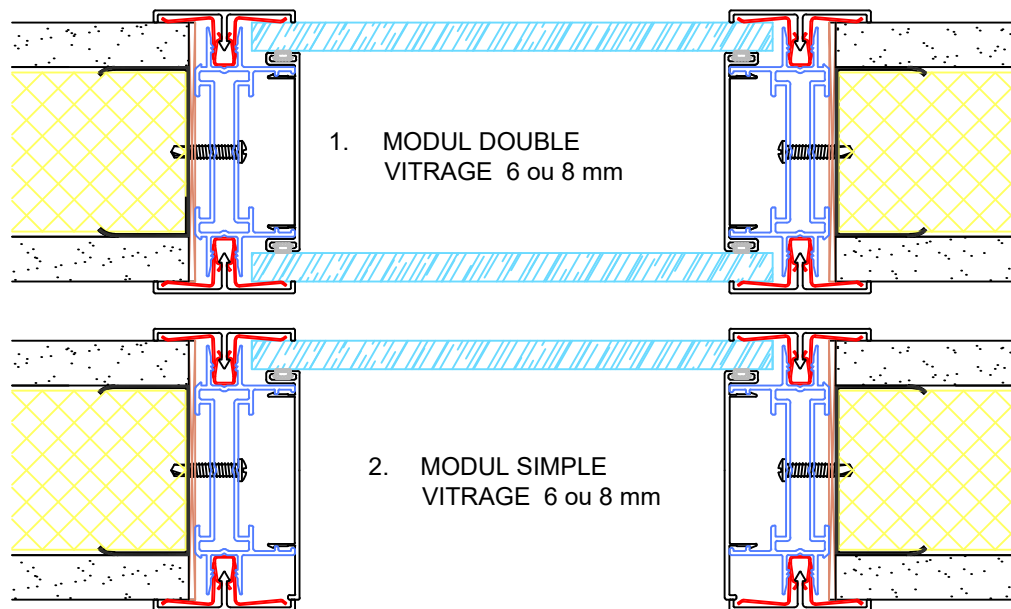

INSERTION DE BLOC PORTE DANS CLOISONS DE DISTRIBUTION 72/48 PAREMENTS SIMPLES BA13

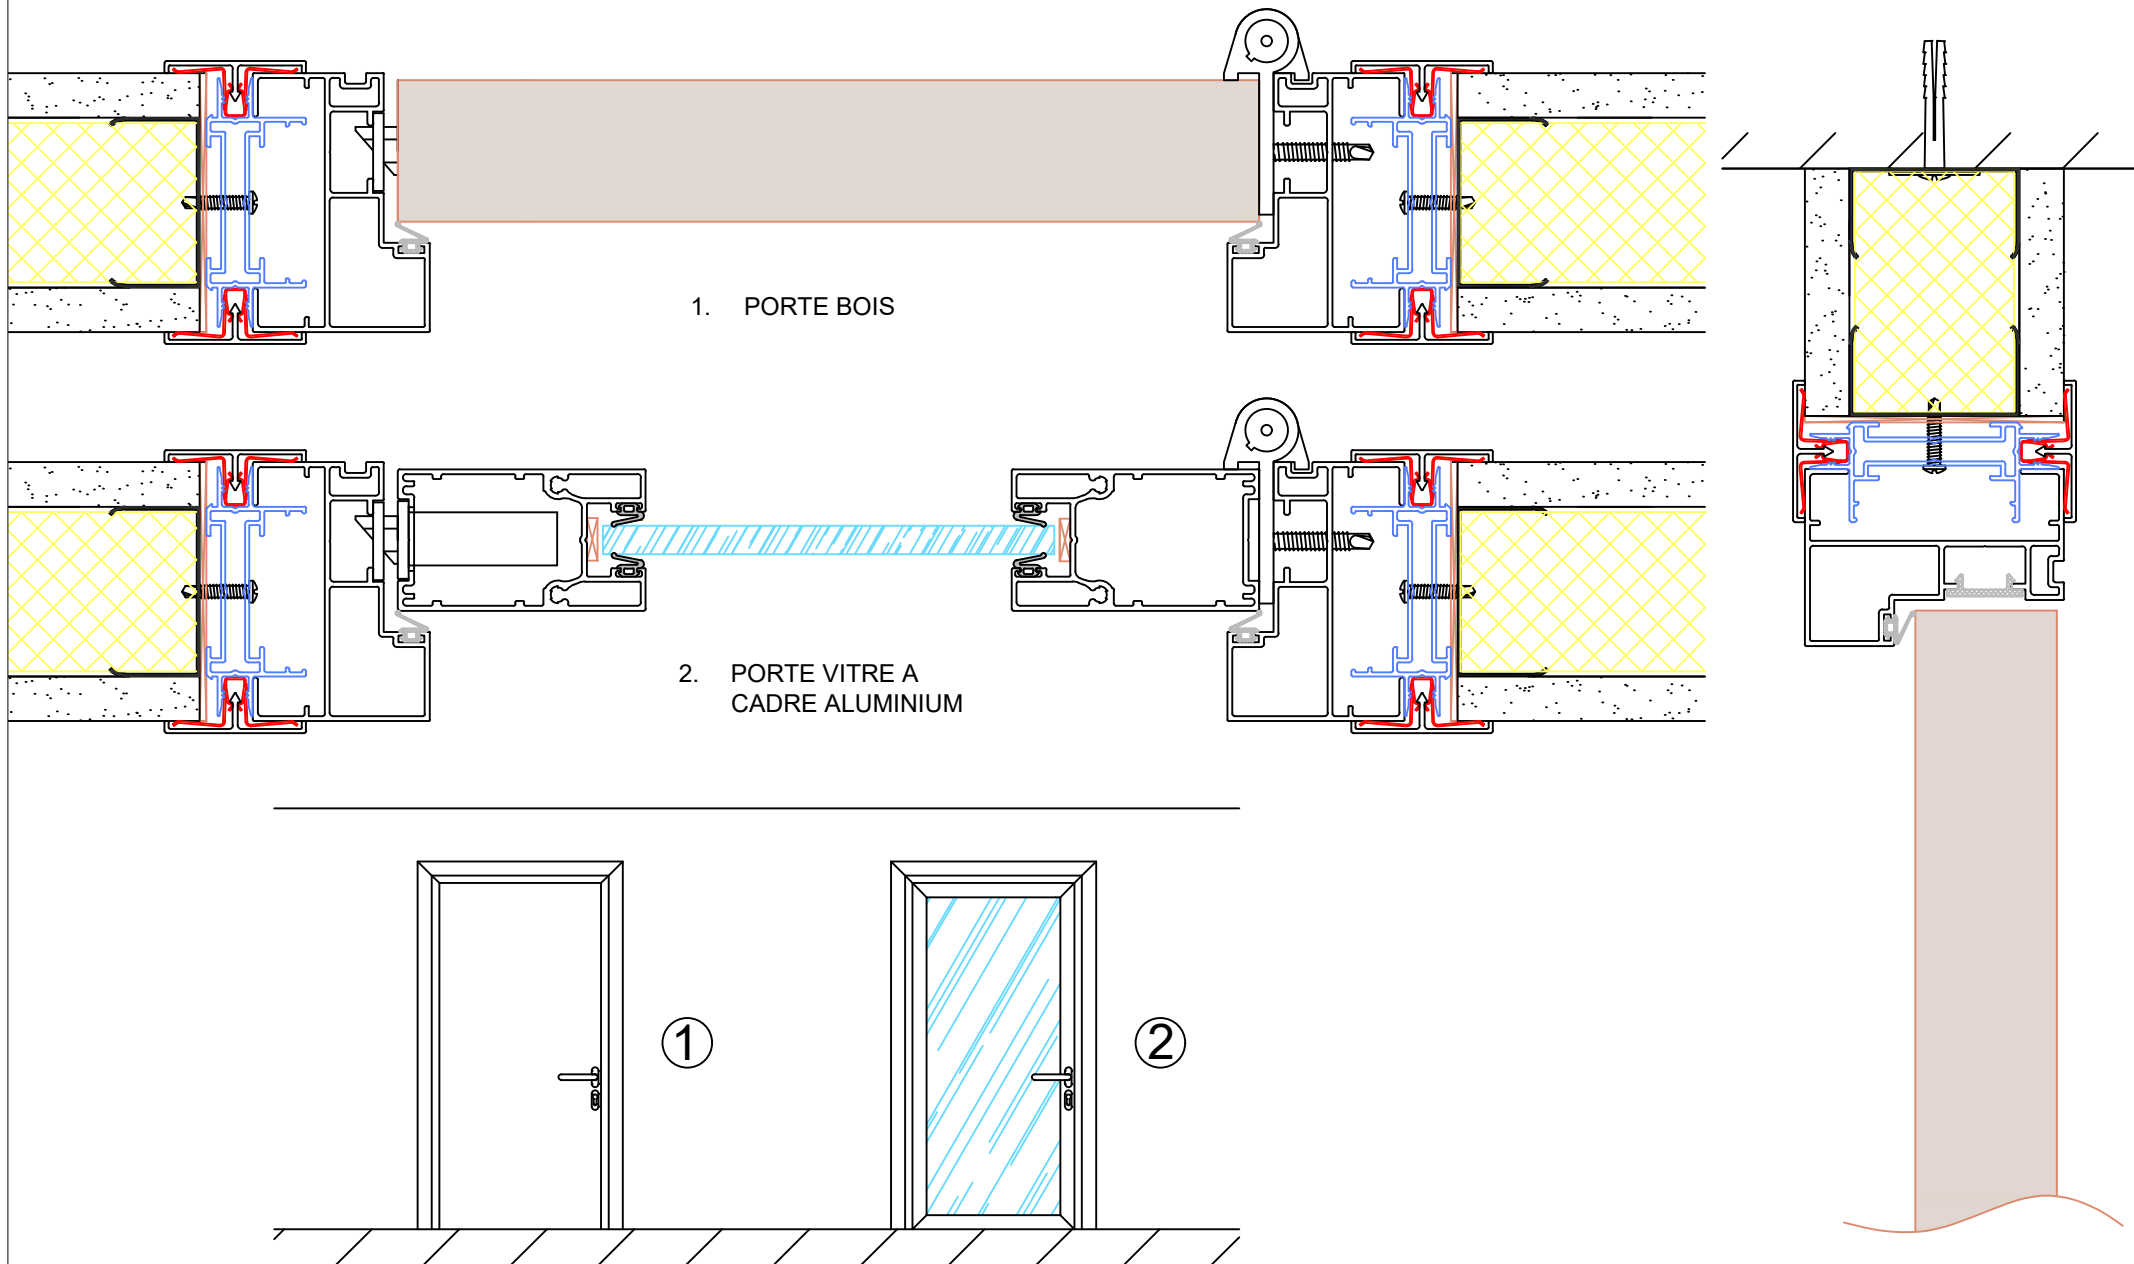

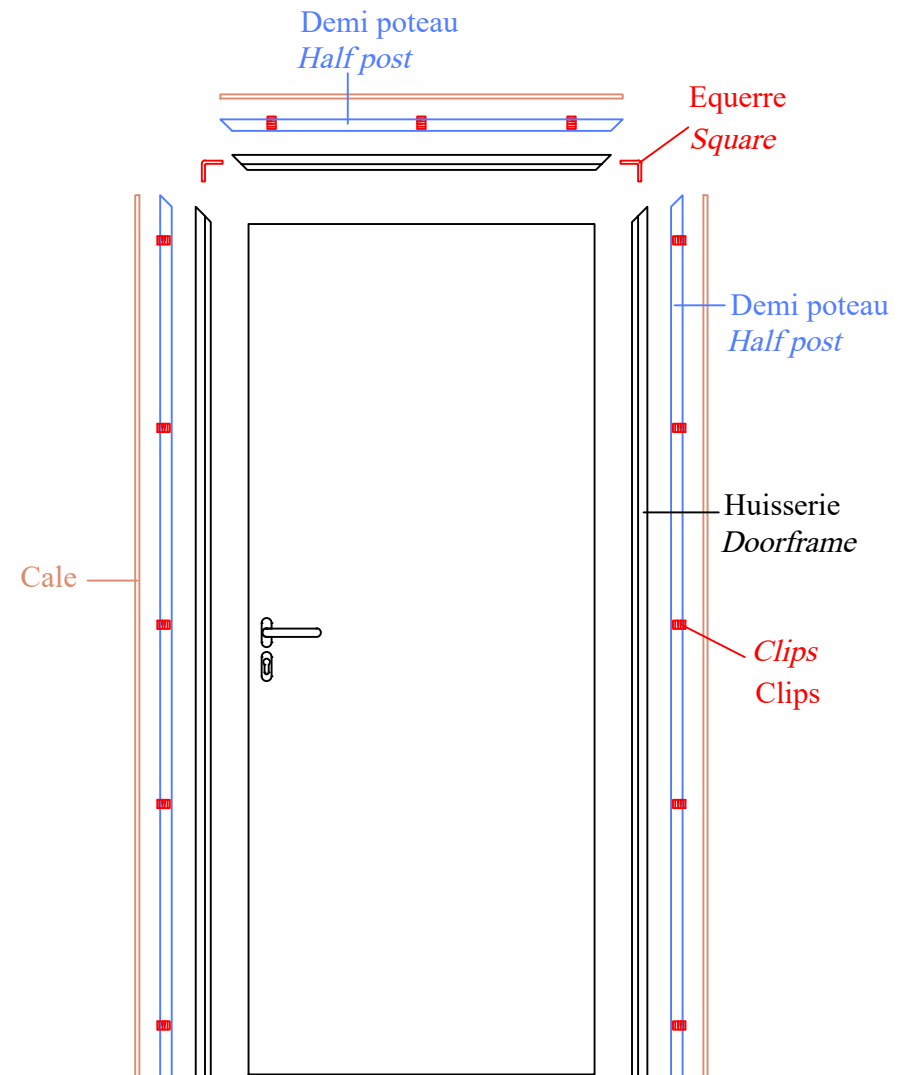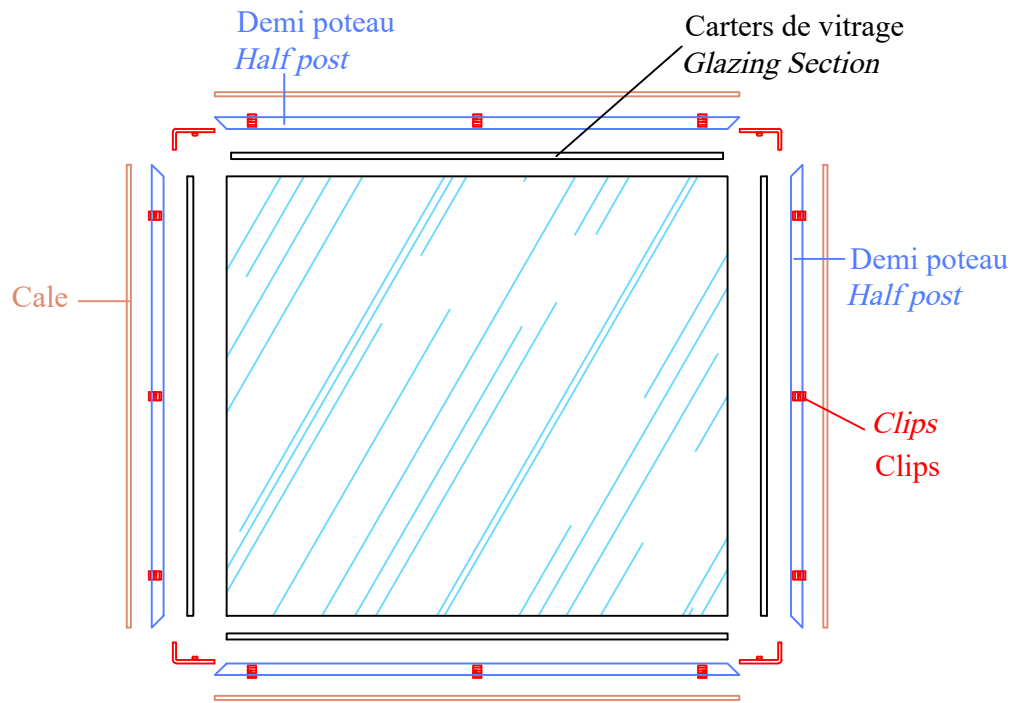

Distance entre clips environs 600 mm
Distance between clips surroundings 600 mm